# PURUI  FIBER CEMENT FELT
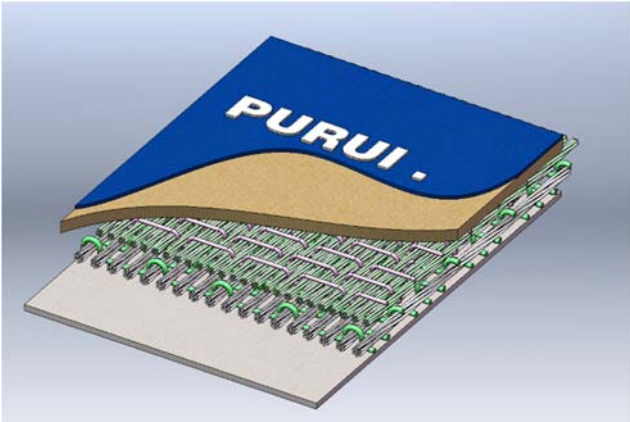
# ABOUT US

PURUI .One of  the top fiber cement felt manufactory in china. With more than 20 years experience in fiber cement industry. we service more than 80 fiber cement company in china.

we provide Hatschek machine felt and Flow on process machine felt for FC industry. With customer demanded ,we also trade some accessroy for FC company, such as S.S wires mesh,abrasive belt etc..
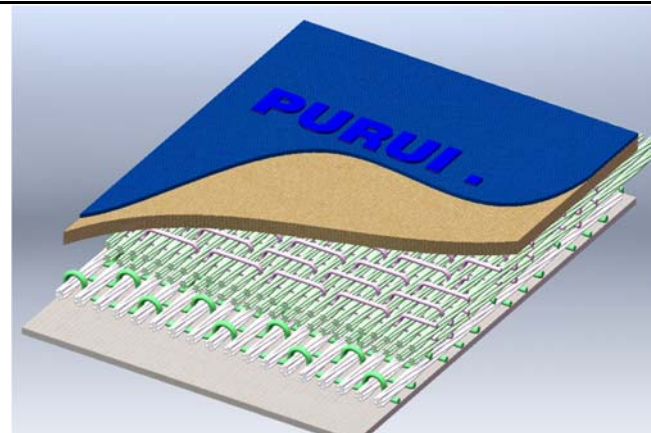
# E-SPEED –HATSCHEK MACHINE FELT

| Basis weight | 1450-1700 GSM |
|---|---|
| Base fabric weigh） | 750-1000 GSM |
| Web weight | 700 GSM |
| BASE : WEB | 56/ 44 |
| MD Yarn | NYLON PLIED MONO   2 layers |
| CD Yarn | NYLON PLIED MONO   2 layers |
| Batt on sheet side | 17& 44 /55Dtex. |
| Batt on roll side | 44 /55Dtex |
| Calliper at dry state | 4-4.8 mm |
| Air permeability | 75-90cfm |
| Treatment | Pre-compaction. |
| Elongation | About  1-1.5% |

Comments:
   1: Specially surface fiber provide   good adhesive property
 2: Full speed when new felt changed
 3: less vacuum cost
 4: Easy to clean and long life time

# E-SMOOTH –HATSCHEK MACHINE FELT

| | |
|---|---|
| Basis weight | 1700-2100 GSM |
| Base fabric weigh） | 950 –1450 GSM |
| Web weight | 750 GSM |
| BASE : WEB | AROUND 57/ 43 |
| MD Yarn | NYLON PLIED MONO   3layers |
| CD Yarn | NYLON PLIED MONO   3 layers |
| Batt on sheet side | 17& 44/55 Dtex. |
| Batt on roll side | 44/55 Dtex |
| Calliper at dry state | 4.5-5.2mm |
| Air permeability | 85-110cfm |
| Treatment | Pre-compaction. |
| Elongation | About 1- 1.5% |
| Comments:<br>  1: Specially  base fabric for smooth property<br> 2: Good dewatering<br> 3: Easy to clean and long life time |  |

# E-MARK –HATSCHEK MACHINE FELT

| | |
|---|---|
| Basis weight | 1700-2100 GSM |
| Base fabric weigh） | 1000 –1500GSM |
| Web weight | 600-700 GSM |
| BASE : WEB | AROUND 59/ 41 |
| MD Yarn | NYLON PLIED MONO   2 layers |
| CD Yarn | NYLON PLIED MONO   2 layers |
| Batt on sheet side | 22& 44/55 Dtex. |
| Batt on roll side | 44/55Dtex |
| Calliper at dry state | 4.5-5.5 mm |
| Air permeability | 90-120cfm |
| Treatment | Pre-compaction. |
| Elongation | About 1- 1.5% |
| Comments:<br>  1: Can give felt mark on board surface<br> 2: Good dewatering<br> 3: Easy to clean and long life time |  |